

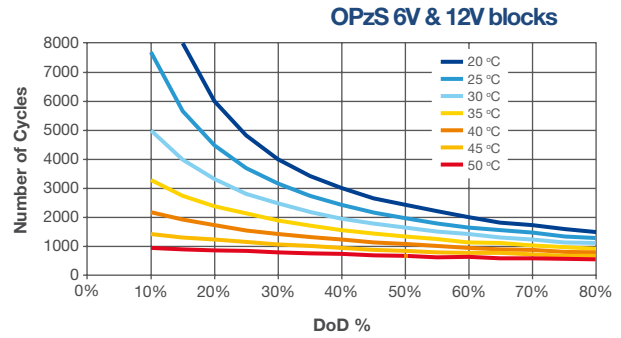


Performance Curves


Expected Number of Cycles vs. DoD

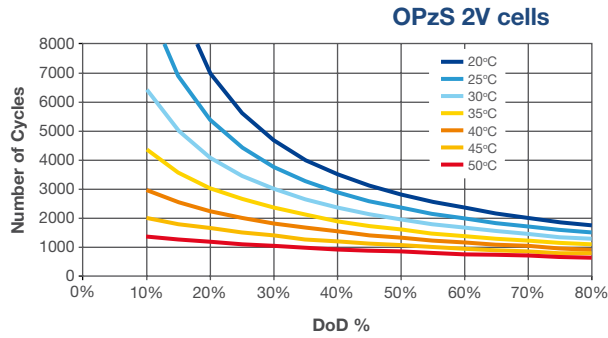

Self-discharge characteristics

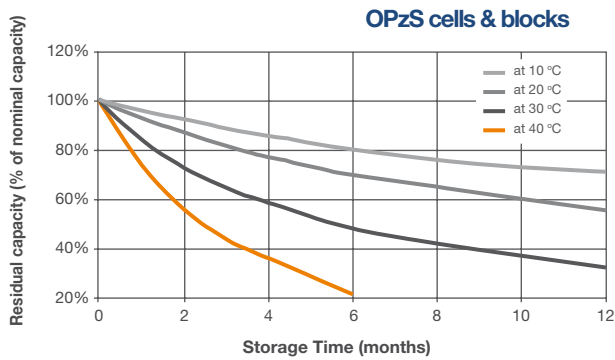

Capacity vs temperature

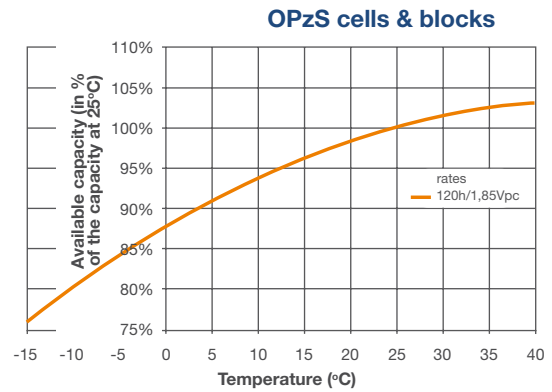

Guidance for the Initial Low-voltage Disconnect Settings (25°C Reference Temperature)

